




PCB RELAYS

PCB RELAYS PE / PE BISTABLE





SCHRACK-INFO

- 1 CO or 1 NO contact, 5 A
- Coil 3 to 48 V DC monostable or bistable
- Nominal coil power: 200 mW
- For industrial electronics, domestic appliances, battery-powered equipment
- Technical data at www.schrack.com

CONTACTS	COIL	CONTACT MAT.	TYPE	EAN CODE	AVAILABLE	ORDER NO.
1 CO, 5 A	5 V DC	AgNi 90/10	PREL-SL-1-UKE-M1-005G-05	9004840158632		PE014005
1 CO, 5 A	12 V DC	AgNi 90/10	PREL-SL-1-UKE-M1-012G-05	9004840160598		PE014012

MINIATURE PCB RELAYS RE





SCHRACK-INFO

- 1 NO contact, 6 A
- Coil 5 to 48 V DC
- Nominal coil power: 200 mW
- For PLCs, timer relays, temperature controllers, interface cards, domestic appliances
- Technical data at www.schrack.com

CONTACTS	COIL	CONTACT MAT.	TYPE	EAN CODE	AVAILABLE	ORDER NO.
1 NO, 6 A	5 V DC	AgCdO	PREL-SW-1-AKE-M1-005G-06	9004840159110		RE030005
1 NO, 6 A	12 V DC	AgCdO	PREL-SW-1-AKE-M1-012G-06	9004840155167		RE030012
1 NO, 6 A	24 V DC	AgCdO	PREL-SW-1-AKE-M1-024G-06	9004839000270		RE030024

Page
462

SLIM PCB RELAY SNR





SCHRACK-INFO

- 1 CO or 1 NO contact, 6 A
- Coil 5 to 60 V DC
- Nominal coil power: 170 mW
- For heating control, narrowest coupling elements, interface applications, PLC, I/O modules
- Technical data at www.schrack.com

CONTACTS	COIL	CONTACT MAT.	TYPE	EAN CODE	AVAILABLE	ORDER NO.
1 CO, 6 A	12 V DC	AgSnO	PREL-SW-1-UKE-M1-012G-06-5.0	9004840240535		SNR03012
1 CO, 6 A	24 V DC	AgSnO	PREL-SW-1-UKE-M1-024G-06-5.0	9004840175097		SNR03024
1 NO, 6 A	24 V DC	AgSnO	PREL-SW-1-AKE-M1-024G-06-5.0	9004840177299		SNR13024



PCB RELAY RY II





SCHRACK-INFO

- Pinning 5 mm
- 1 CO, NO or NC contact, 8 A
- Coil 5 to 60 V DC
- Nominal coil power: 220 mW
- for heating controls, timer relays, timers
- Technical data at www.schrack.com

CONTACTS	PINNING	COIL	EAN-CODE	AVAILABLE	ORDER NO.
1 CO, 8 A	3.2 mm	12 V DC	9004840158212		RY210012
1 CO, 8 A	3.2 mm	24 V DC	9004840155112		RY210024
1 NO, 8 A	5 mm	12 V DC	9004840185867		RY530012
1 CO, 8 A	3.2 mm	24 V DC	9004840156126		RY612024

POWER RELAYS RT



SCHRACK-INFO

- 1 and 2 CO or NO contacts, 8/12/16 A
- Coil 5 to 110 V DC, 24 to 230 V AC
- Monostable and bistable
- Inrush, sensitive and high-temperature
- Pinning 3.5 and 5 mm
- Universal application
- Technical data at www.schrack.com

CONTACTS	PINNING	COIL	EAN-CODE	AVAILABLE	ORDER NO.
2 CO, 8 A	5 mm	6 V DC	9004840158939		RT424006
2 CO, 8 A	5 mm	12 V DC	9004839019241		RT424012
2 CO, 8 A	5 mm	24 V DC	9004839019142		RT424024
2 CO, 8 A	5 mm	48 V DC	9004839027185		RT424048
2 CO, 8 A	5 mm	60 V DC	9004840193558		RT424060
2 CO, 8 A	5 mm	110 V DC	9004840191561		RT424110
2 CO, 8 A	5 mm	24 V AC	9004839034602		RT424524
2 CO, 8 A	5 mm	48 V AC	9004840167641		RT424548
2 CO, 8 A	5 mm	115 V AC	9004840158021		RT424615
2 CO, 8 A	5 mm	230 V AC	9004839034282		RT424730
2 CO, 8 A	5 mm	5 V DC - bistable	9004840166491		RT424A05
2 CO, 8 A	5 mm	24 V DC - bistable	9004840193572		RT424A24
2 CO, 8 A	5 mm	12 V DC - bistable	9004840158205		RT424F12
2 CO, 8 A	5 mm	24 V DC - bistable	9004840160864		RT424F24
2 CO, 8 A	5 mm	24 V DC	9004840160628		RT425024
2 CO, 8 A	5 mm	115 V AC	9004840187748		RT425615
2 CO, 8 A	5 mm	230 V AC	9004840166040		RT425730
2 CO, 8 A	5 mm	24 V DC	9004839029103		RTE24024

OTHER PCB RELAYS



SCHRACK-INFO

- RP 2
- Card relay E (RP 1, V23057)

CONTACTS	PINNING	COIL	EAN-CODE	AVAILABLE	ORDER NO.
1 CO, 16 A	5 mm	12 V DC	9004840155181		RP310012-A
1 CO, 16 A	5 mm	24 V DC	9004840166033		RP310024-A
1 CO, 8 A	3.5 mm	24 V DC	9004840155235		RP418024-A
2 CO, 8 A	5 mm	12 V DC	9004840155242		RP420012-B
2 CO, 8 A	5 mm	24 V DC	9004840155259		RP420024-B
2 CO, 8 A	5 mm	24 V AC	9004840189964		RP420524-B
2 CO, 8 A	5 mm	230 V AC	9004840189988		RP420730-B
2 CO, 8 A	5 mm	24 V DC	9004840157970		RP421024-B
2 CO, 8 A	5 mm	48 V DC	9004840160581		RP421048-B
1 CO, 8 A	2.5 mm	12 V DC	9004840166910		RP510012-E
1 CO, 8 A	2.5 mm	24 V DC	9004840165029		RP510024-E
1 CO, 8 A	2.5 mm	60 V DC	9004840231175		RP510060-E
1 NO, 8 A	2.5 mm	24 V DC	9004840180107		RP531024-H
1 CO, 8 A	2.5 mm	5 V DC	9004840160840		RP610005-E
1 CO, 8 A	2.5 mm	12 V DC	9004840172720		RP610012-E
1 CO, 8 A	2.5 mm	24 V DC	9004840165012		RP611024-E
1 CO, 16 A	5 mm	24 V DC	9004840185508		RP710024-A
2 CO, 8 A	5 mm	24 V DC	9004840185546		RP820024-A
2 CO, 8 A	5 mm	24 V DC	9004840169720		RP821024-A
1 NO, 10 A	5 mm	24 V DC	9004840161427		RTH84024



I KNOW WHERE TO FIND IT!


WITH THE SCHRACK TECHNIK LIVE-PHONE APP

- Access technical product information at any time and from everywhere
- See availability and price immediately
- Order desired products easily

SOCKETS FOR PCB CONNECTION




RP78601




RT16041

DESCRIPTION	EAN CODE	AVAILABLE	ORDER NO.
SOCKET			
PCB socket for PCB relay with 3.5 mm pinning	9004840157888		RP78601
PCB socket for PCB relay with 5.0 mm pinning	9004840100518		RP78602
ACCESSORIES			
Retaining clip for RT relay	9004840167764		RT16041
Retaining clip for RT PCB socket, metal	9004840191578		RT28516

PT SOCKETS WITH SOLDER/PCB TERMINALS



PT78600




PT78604

SCHRACK-INFO

- Rated current: 10 A
- Rated voltage: 250 V~
- Dielectric strength peak/cont.: >1500 V_{eff}
- Ambient temperature: -40...+70 °C


DIMENSIONS (mm)

Plug-in socket with solder terminals, 4-pole PT78600

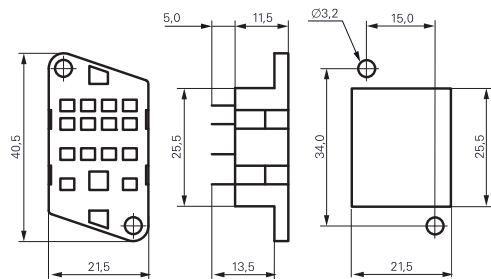

Mounting plate recess

Plug-in sockets with PCB terminals PT78602/03/04

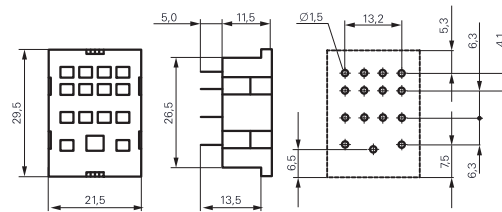

DESCRIPTION	PU	EAN CODE	AVAILABLE	ORDER NO.
PT SOCKET WITH SOLDER/PCB TERMINALS				
Plug-in socket with PCB terminals, 4-pole, 6 A	100	9004840226829		PT78604
Plug-in socket with PCB terminals, 3-pole, 10 A	100	9004840153996		PT78603
ACCESSORIES FOR PT SOCKETS				
Retaining clip for PCB socket, metal	10	9004840154108		PT28802

MT PLUG-IN BASES WITH SOLDER-PINS




MT78603

SCHRACK-INFO

- Rated current 10 A
- Rated voltage 250 V~
- Dielectric strength peak/cont. >2500 V_{eff}
- Ambient temperature -40...+70 °C

DIMENSIONS (mm)

Plug-in sockets 11-pole with PCB terminals MT787 603



DESCRIPTION	WxHxD (mm)	PU	EAN CODE	AVAILABLE	ORDER NO.
11-pole plug-in socket with PCB terminal	Ø 28x19	25	9004840226881		MT78603



I KNOW WHERE TO FIND IT!

THE SCHRACK TECHNIK WEB SHOP WITH NAVIGATOR
WWW.SCHRACK.COM

- Finding product information made easy
- Buying products around the clock
- Quick access customer service